



General info


Technical - Linear system

Indoor suspended, recessed or ceiling mounted linear fitting with integrated LED sources and direct light emission

Ean	8021696192604
Item	FLUO WIDE 1800 4000K WH
Installation	Ceiling, Suspension, Recessed (Ceiling)
Guarantee	5 years
Gross weight	6.83 kg
Volume	0.026861 m³

Technical info

Net weight	4.42 kg
Insulation class	I
Protection index	IP20
Operating temperature	0° ~ +40 °C
Dimmer	Non-dimmable, On-Off
Power output	220-240 V AC 50/60 Hz
Power supply	In-built, included
Accessories not included	YES (by qualified operators only), electronic, tridonic Mounting kit (suspension, recessed, surface), Dimmable driver, Luminous corner, Structure connector

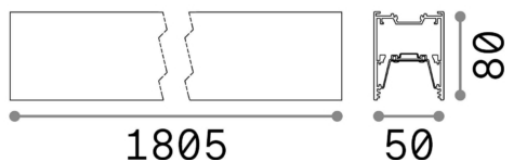

Source info

Integrated source	Integrated LED module
Replaceable source	Replaceable (by qualified operators only)
Power	36W
Emission	Direct
Max consumption	max 36,00 W
Features LED	LED SMD SAMSUNG
CCT	4000 K
Duration LED (t. 25°C)	50000 h
CRI	> 80
SDCM	3
Light beam	105°
Light beam flux	5300 lm
Useful light flux	4000 lm
Standby power	< 0.50